


TECHNICAL SPECIFICATIONS

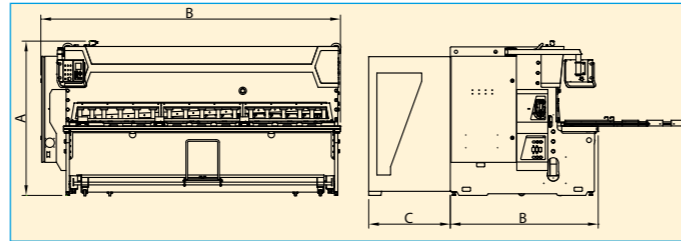

X-Cut Shear	Cutting capacity [mm] S275 (430 N/mm ²)	Cutting capacity [mm] AISI 304 (430 N/mm ²)	Cutting length [mm]	No. of strokes /min	Cutting angle 0.5° max [°]	Backgauge reach [mm]	Backgauge accuracy [mm]	Backgauge repeatability [mm]	No. of hold-downs pad	Machine height A [mm]	Machine length B [kg]	Machine depth C [mm]	Rear guard depth D [mm]	Weight [ton]
2004	4	3	2050	22 ÷ 40	2.5	1000	±0,05	±0,02	12	2065	2600	1555	1150	4.3
3004			3050	16 ÷ 31	2.5				17	1800	3600	1950	1150	5.5
4004			4100	11 ÷ 28	3.0				22	1870	4700	2050	1150	8.5
6004			6100	11 ÷ 25	2.0				32	2290	6900	2300	1150	17.0
3006	6	4	3050	12 ÷ 28	3.0				17	1900	3600	2300	1150	7.7
4006			4100	10 ÷ 25	3.0				22	2050	4700	2190	1150	10.9
6006			6100	10 ÷ 24	2.5				32	2700	6900	2350	1150	17.9
3010	10	8	3050	15 ÷ 30	3.0				16	2200	3740	2460	1150	11.5
4010			4100	9 ÷ 22	3.0				22	2200	4860	2500	1150	17.0
6010			6100	7 ÷ 17	2.5				32	2850	6860	2560	500	27.2
3012	12	10	3050	14 ÷ 28	3.0				16	2200	3740	2460	1150	11.5
4012			4100	8 ÷ 20	3.0				22	2200	4860	2500	1150	17.0
6012			6100	7 ÷ 17	2.5				32	2850	6860	2560	500	27.2
3016	16	11	3050	12 ÷ 25	3.0				16	3050	3850	2600	1150	20.0
4016			4100	9 ÷ 18	3.0				21	3050	5050	2750	1150	26.5
6016			6100	7 ÷ 17	3.0				30	3050	7000	2900	-	52.5
4020	20	13	4100	9 ÷ 15	3.0	20	3180	5000	2730	-	32.5			
6020			6100	7 ÷ 15	2.5°	30	3180	7050	2900	-	63.0			
6030	30	22,5	6100	4 ÷ 11	2.5°	26	3420	7100	2900	-	75.0			